



PURITY FINEST C – FOR SPECIAL ESPRESSO MOMENTS

Technology: softening

Dolce Vita in cups

PURITY Finest optimised water, with its ideal mineral composition, releases the individual aroma of each espresso from the ground coffee. This supports the development of the authentic espresso taste, just the way you like it.

Elements that negatively affect taste and aroma such as chlorine are reliably filtered out whilst the freshly filtered water provides the ideal crema in terms of colour and consistency for that perfect espresso.



Filter management app

Download our free of charge BRITA Professional FilterManager app and get a reminder for your next filter exchange – automatically, wherever you are. For smartphone and tablets.

For more information please visit: professional.brita.net/app



Available from June 2015
PURITY Finest C150
(1.100 l at 10 °dH and 0 % bypass) &
PURITY Finest C1100
(6.000 l at 10 °dH and 0 % bypass)

Your advantages – optimised water for those special espresso moments and optimum machine protection.

- Unique, intensive espresso taste with full body and authentic aroma
- A thick, golden-brown crema that lasts
- Optimal results for all espresso based coffee specialities
- Reliable protection for professional coffee machines from limescale and gypsum deposits
- Reduction of elements that negatively affect aroma and taste
- One filter head concept for all cartridge versions in the PURITY C range: with rapid-change system, innovative locking handle and integrated flush valve for easy operation

PURITY Finest C

A special espresso succeeds only with perfect water!



Systematic filter technology

1. Pre-filtration

A pre-filter retains coarse particles.

2. Total hardness reduction


The filter medium reduces the total hardness in the water and clearly reduces limescale and gypsum deposits.

3. Activated carbon filtration

All of the water – including the bypass water – runs through an activated carbon filter, so substances that have an adverse effect on the taste and aroma are removed.

4. Fine filtration

At the end of the filtration process a fleece retains any fine particles.

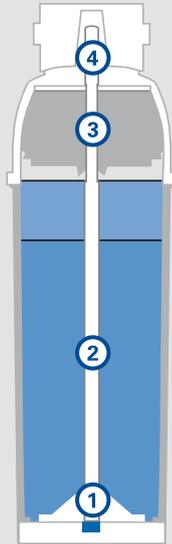

The illustration serves as explanation of the filter technology. It is not to scale.

The PURITY promises:

Optimum water quality

Outstanding and consistent water quality – free of unwanted taste and aroma elements.

Maximum product safety

For uninterrupted operation and safe use.

Simple to use

Operation is simpler and easier than ever.

The food safety of BRITA Professional water filter products is tested and monitored by independent institutes.



**applies to all materials in contact with water

	PURITY Finest		
	C150	C500	C1100
Capacity ¹ with a total hardness of 10 °dH and 0% bypass ²	1.100l	3.414l	6.000l
Max. operating pressure	8,6bar		
Water intake temperature	4–30 °C		
Flow at 1 bar pressure loss	145l/h	140l/h	150l/h
Nominal flow	60l/h	100l/h	
Pressure loss at nominal flow	0.25bar	0.5bar	
Dimensions (W/D/H) Filter head with filter cartridge	117/104/419mm	144/144/557mm	184/184/557mm
Weight (dry/wet)	1.8/2.8kg	4.6/6.9kg	7.7/12.5kg
Connections (input/output)	G3/8" or John Guest* 8mm		
Operating position	vertical		

¹ The capacities given have been tested and calculated on the basis of normal application and machine conditions. Due to external influences (e.g. variations in raw water quality and/or machine type), deviations from these results can occur.

² PURITY Finest C cartridges must be operated with a bypass setting of 0%.

Remark: With PURITY Finest C cartridges, all the feed water is filtered. The filter cartridge can be operated with filter heads with variable and fixed bypass. A possible bypass element set in the filter head is, however, not taken into account.

Products	Order number		
	C150	C500	C1100
Filter cartridge	1017517 (pack 1)	1008830 (pack 1)	1017518 (pack 1)
Filter head 0% ² , G3/8"	1002949 (pack 1)/297177 (pack 20)*		
Filter head 0% ² , JG8	1002942 (pack 1)*/297176 (pack 20)*		
Filter head 0–70% ² , G3/8"	1013637 (Pack 1)/1013634 (Pack 20)*		
Filter head 0–70% ² , JG8	1013636 (Pack 1)* / 1013633 (Pack 20)*		
PURITY C filter head set III 0–70% ² (filter head G3/8", backflow preventer, CH test kit, wall mounted bracket)	1002937		
Accessories			
Flow meter BRITA FlowMeter 10–100A	298900		
Total hardness and carbonate hardness test kit	710403		
Carbonate hardness test kit	710800		
Total hardness test kit	536754		
Backflow preventer G3/8"	1000639 (Pack 3)		
Backflow preventer JG8	292068 (Pack 3)*		

Appropriate hoses and hose sets from our comprehensive FlexConnect range as well as other accessories can be found in our price list.

* Not available in Switzerland

Only drinking quality water may be used as the water supply for BRITA water filters.

Headquarters

BRITA GmbH
Heinrich-Hertz-Straße 4
D – 65232 Taunusstein

BRITA Water Filter Systems Ltd.

BRITA House
9 Granville Way
Bicester
GB – Oxfordshire OX26 4JT
tel.: +44 (0) 844 742 4990 | fax: +44 (0) 844 742 4902
clientservices@brita.co.uk
www.brita.co.uk

